

General Purpose VRLA Battery

DD12240

12V
Voltage

24Ah
Capacity

AGM
Technolog

General
Purpose

FC series General Purpose VRLA batteries are designed with AGM(Absorbent Glass Mat) technology. FC series offers 5 years($\leq 20Ah$) and 10 years($\geq 20Ah$) full maintenance free design life. With a compact design and good reliability, this series is highly suited for security and alarm systems, UPS systems, emergency light systems and other small backup applications.



GENERAL FEATURES

- Can be used at vertical or horizontal orientation
- High Reliability and Good Quality
- High gas recombination efficiency
- High Power Density
- Maintenance-Free Operation

APPLICATIONS

- UPS & EPS
- Emergency lighting Systems
- Medical Equipment
- Cable TV Systems
- Alarm Systems
- Electric Test Equipment
- Security Systems




COMPLIED STANDARDS

IEC 60896-21/22 JIS C8704
YD/T799 BS6290 part4
GB/T 19638 UL 1989

DIMENSIONS & WEIGHT

Length(mm)	165 ± 1
Width(mm)	126 ± 1
Height(mm)	174 ± 1
Total Height(mm)	174 ± 1
Weight(kg)	7.7 ± 2%

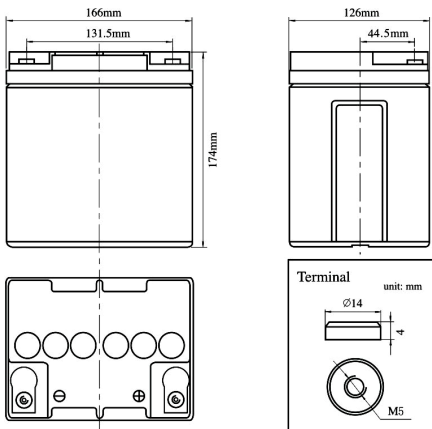

TECHNICAL SPECIFICATIONS

Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25℃		10 Years
Nominal Capacity @25℃ (10 hour rate@2.4A,10.8V)		24Ah
Capacity @25℃	20hour rate (1.27A,10.8V)	25.4Ah
	5 hour rate (4.2A,10.5V)	21.0Ah
	1 hour rate (15.3A,9.6V)	15.3Ah
Internal Resistance	Full Charged Battery@25℃	≤14mΩ
Ambient Temperature	Discharge	-15℃~45℃
	Charge	-15℃~45℃
	Storage	-15℃~45℃
Max.Discharge Current@25℃		144A(5s)
Capacity affected by Temperature (10 hour)	40℃	105%
	25℃	100%
	0℃	85%
	-15℃	65%
Self-Discharge@25℃ per Month		3%
Charge (Constant Voltage) @25℃	Standby Use	Initial Charging Current Less than 7.2A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 7.2A Voltage 14.4-14.9V

BATTERY DISCHARGE TABEL

Discharge Constant Current per Cell (Amperes at 25℃)







F.V/Time	15min	30min	45min	1h	2h	3h	5h	6h	8h	10h	20h
1.60V	43.3	25.5	19.3	15.3	9.0	6.6	4.5	3.9	3.0	2.5	1.33
1.65V	40.9	24.2	18.6	14.9	8.7	6.4	4.4	3.8	3.0	2.5	1.32
1.70V	38.4	23.5	17.9	14.3	8.5	6.2	4.3	3.7	3.0	2.4	1.31
1.75V	36.0	22.4	17.1	13.7	8.3	6.1	4.2	3.7	2.9	2.4	1.29
1.80V	33.8	21.6	16.5	13.2	7.9	5.9	4.1	3.6	2.9	2.4	1.27

Discharge Constant Power per Cell (Watts at 25℃)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	6h	8h	10h	20h
1.60V	82.8	50.7	36.7	29.4	17.1	12.6	8.6	7.5	6.0	4.9	2.6
1.65V	79.2	48.5	35.4	28.6	16.6	12.3	8.5	7.4	5.9	4.9	2.5
1.70V	73.8	46.5	34.3	27.6	16.2	12.0	8.4	7.3	5.8	4.8	2.5
1.75V	69.3	44.2	33.0	26.6	15.8	11.8	8.2	7.2	5.8	4.8	2.5
1.80V	65.0	42.4	31.8	25.7	15.3	11.4	8.1	7.1	5.7	4.8	2.5

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery

PERFORMANCE CHARACTERISTICS

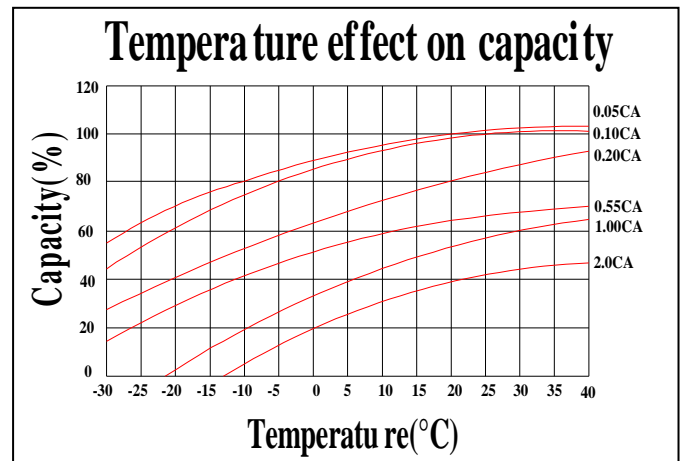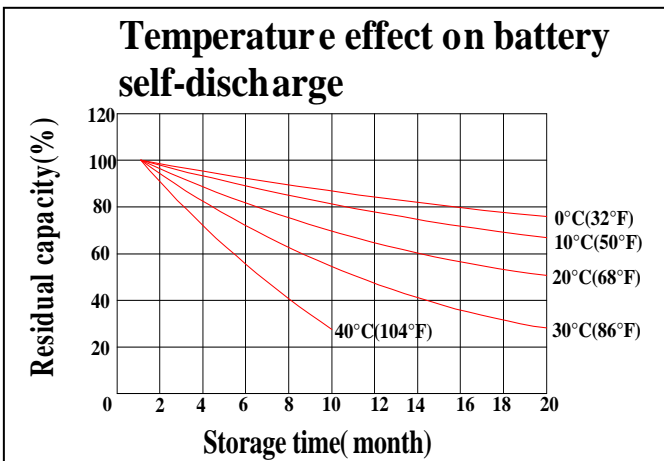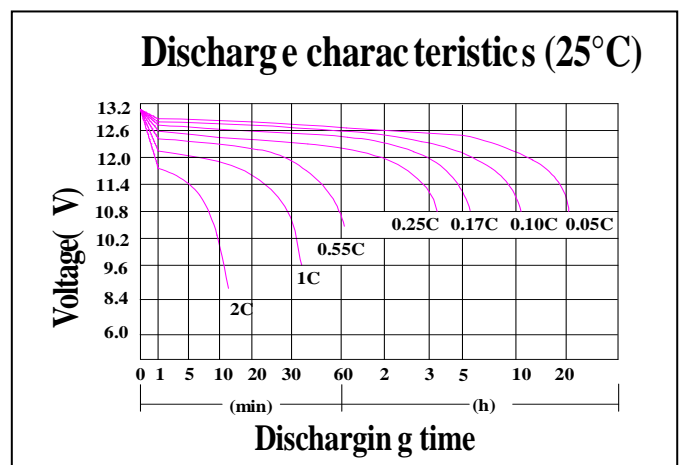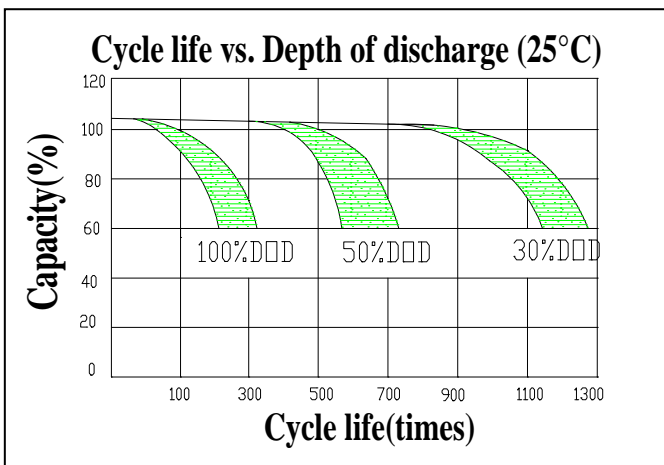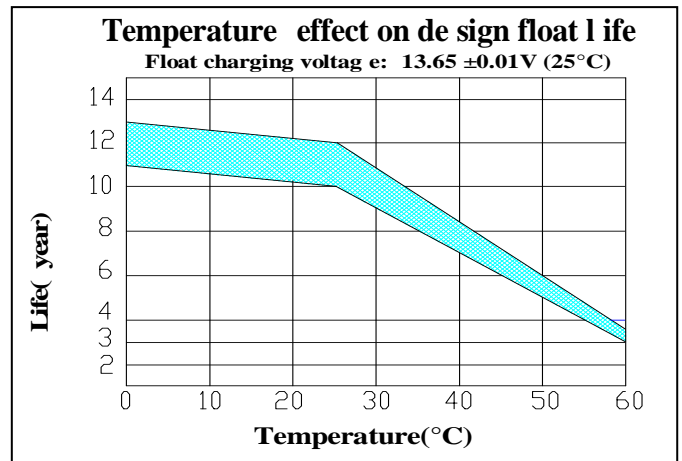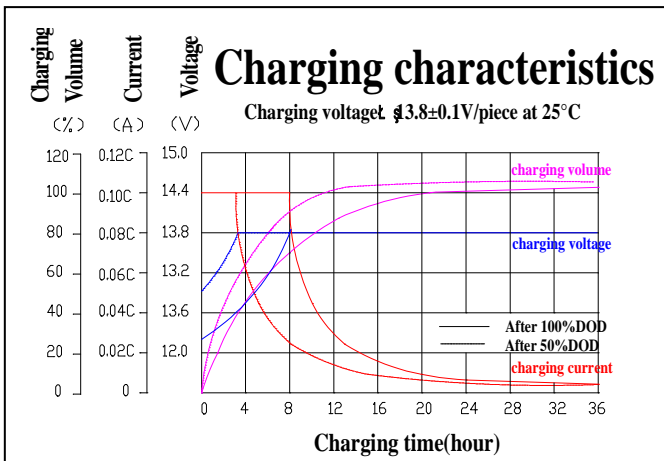

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Standard Pb-Ca-Sn grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubber aging resistor	Female Copper Insert M6 (torque: $3 \sim 4N.m$)	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid	Two layers epoxy resin seal